


NSi

SEPTEMBER 2007

Easy-Twist™

WIRE CONNECTORS

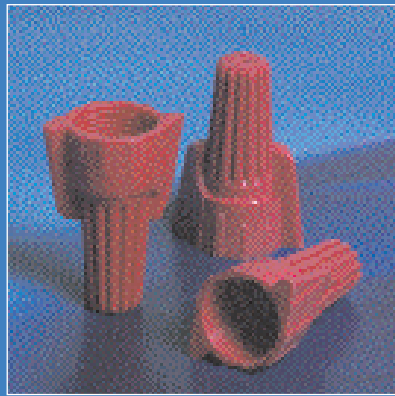

www.nsiindustries.com • Phone: 800.321.5847 • Fax: 800.841.5566

TORK® POLARIS™ EASY-TWIST™ LIGHTING TORKALERT™

MAKE AN EASY CONNECTION...

Any way you
want it!



The Easy-Twist™ Family:
Bags, Boxes, Jars, Handy Pails & Bulk!

Contact your Representative today!
NSi Industries, LLC • 800.321.5847 • www.nsiindustries.com

TORK® POLARIS™ EASY-TWIST™ LIGHTING TORKALERT™

Table of Contents

EASY-TWIST™

TWIST-ON WIRE CONNECTOR

Combination Pails	1
Winged	2
Winged Grounding	3
N Type	3
Standard Type	4

TWIST-ON SPECIALTY WIRE CONNECTORS

High Temperature	5
----------------------------	---

OTHER WIRE CONNECTORS

Crimp Sleeve	5
Nylon Closed End	5

PUSH-IN WIRE CONNECTORS

Push-In	6
-------------------	---


THE FINE PRINT

Alphanumeric Index	8
How to Reach Us	8
Terms and Conditions	8

Easy-Twist™ wire connectors are available in a variety of packaging and merchandising options.

Call your inside Sales Representative at 800-321-5847 to find out more!


WINGED WIRE CONNECTORS



- Exceptional design makes twisting easier, ensuring proper installation – especially in tight spaces
- Deep surface ridges provide better grip
- Threaded funnel entry guides the wires into the connector easily
- Swept-back wing design provides handling comfort and increased torquing ability
- Square wire spring provides secure gripping of conductors

- Deep skirt entry provides protection from flashover and shorts
- Flame retardant thermoplastic shell provides excellent electrical insulation
- Temperature rating 105°C (221°F)
- Pre-twisting of wires is not necessary
- 1,000 volt maximum in fixtures and signs.

DIMENSIONS



CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
WWC-Y	6.40	0.252	9.80	0.386	18.20	0.717	9.00	0.354	25.80	1.016
WWC-T	7.20	0.283	11.60	0.457	18.30	0.720	9.20	0.362	29.00	1.142
WWC-R	9.00	0.354	13.50	0.531	23.00	0.906	9.60	0.378	31.80	1.252
WWC-G	10.00	0.394	14.90	0.587	25.50	1.000	10.00	0.394	33.30	1.311
WWC-B	12.00	0.472	18.80	0.740	32.00	1.260	13.10	0.516	40.00	1.575

DIVIDED COMBINATION PAILS

FOR COPPER WIRE ONLY

ITEM	CATALOG NO.	UPC CODE	QUANTITY/CONTENTS				PACKAGING CARTON	WEIGHT LBS./CTN.
HANDY PACK PAIL #1	ET-CP-1	14190	70 WWC-T	80 WWC-Y	45 WWC-R	20 WWC-B	12 pails	23
HANDY PACK PAIL #2	ET-CP-2	14191	100 WC-O	75 WC-Y	50 WC-R	70 WWC-T	12 pails	22
HANDY PACK PAIL #3	ET-CP-3	14192	100 WC-O	70 WWC-T	80 WWC-Y	45 WWC-R	12 pails	22
FOUR-PACK PAIL #1	ET-CP-11	14193	40 WWC-T	50 WWC-Y	30 WWC-R	10 WWC-B	16 pails	16
FOUR-PACK PAIL #2	ET-CP-12	14194	65 WC-O	45 WC-Y	30 WC-R	40 WWC-T	16 pails	18
FOUR-PACK PAIL #3	ET-CP-13	14195	60 WC-O	45 WWC-T	50 WWC-Y	30 WWC-R	16 pails	19
FOUR-PACK PAIL #4	ET-CP-14	14323	65 WC-O	45 WC-Y	30 WC-R	100 WC-B	16 pails	18
FOUR-PACK PAIL #5	ET-CP-15	14324	120 WC-G	100 WC-B	65 WC-O	45 WC-Y	16 pails	17



Handy-Pack and Four-Pack pails offer you the convenience of the most common Easy-Twist connectors. Three different sets are available in two different sized pails.



Socket installation tools are included at no extra charge in each **bag** of Easy-Twist connectors (catalog number with B suffix, excluding Blue Winged Wire connectors). They will fit any pneumatic or electrical tool with a 1/4 inch chuck or drive socket.



WINGED WIRE CONNECTORS



FOR COPPER WIRE ONLY

CATALOG NO.	UPC CODE	UNIT	PACKAGING		WEIGHT LBS./CTN.
				CARTON	
 <p>YELLOW 18-10 AWG WIRE RANGE: max: 3 #12 min: 2 #18 VOLTAGE: 600 volt/300 volt**</p>					
WWC-Y-H	14104	bag of 25 with header	5,000	(200 bags of 25)	26
WWC-Y-C	14101	box of 100	3,200	(32 boxes of 100)	21
WWC-Y-CJ	14232	small jar of 100	5,000	(50 jars of 100)	27
WWC-Y-SJ	14243	standard jar of 200	4,000	(20 jars of 200)	22
WWC-Y-J	14105	large jar of 550	6,600	(12 jars of 550)	32
WWC-Y-P	14182	pail of 350	4,200	(12 pails of 350)	22
WWC-Y-B*	14102	bag of 500	6,500	(13 bags of 500)	27
WWC-Y-CB	78831	blister box of 40	varies based on quantity ordered		
WWC-Y	14103	bulk	5,000		23
WWC-Y-D	14106	fibre drum	35,000		94
 <p>TAN 22-8 AWG WIRE RANGE: max: 3 #10 min: 3 #22 VOLTAGE: 600 volt/300 volt**</p>					
WWC-T-H	14132	bag of 25 with header	5,000	(200 bags of 25)	30
WWC-T-C	14124	box of 100	3,200	(32 boxes of 100)	19
WWC-T-CJ	14233	small jar of 100	5,000	(50 jars of 100)	31
WWC-T-SJ	14244	standard jar of 150	3,000	(20 jars of 150)	20
WWC-T-J	14147	large jar of 450	5,400	(12 jars of 450)	31
WWC-T-P	14181	pail of 300	3,600	(12 pails of 300)	23
WWC-T-B*	14125	bag of 500	6,000	(12 bags of 500)	30
WWC-T-CB	78832	blister box of 30	varies based on quantity ordered		
WWC-T	14126	bulk	5,000		25
WWC-T-D	14006	fibre drum	30,000		206
 <p>RED 18-8 AWG WIRE RANGE: max: 5 #12 min: 3 #16 VOLTAGE: 600 volt/300 volt**</p>					
WWC-R-H	14114	bag of 25 with header	4,000	(160 bags of 25)	27
WWC-R-C	14111	box of 100	3,200	(32 boxes of 100)	28
WWC-R-SJ	14245	standard jar of 100	2,000	(20 jars of 100)	21
WWC-R-J	14115	large jar of 300	3,600	(12 jars of 300)	32
WWC-R-P	14180	pail of 200	2,400	(12 pails of 200)	23
WWC-R-B*	14112	bag of 500	3,500	(7 bags of 500)	27
WWC-R-CB	78830	blister box of 25	varies based on quantity ordered		
WWC-R	14113	bulk	5,000		40
WWC-R-D	14116	fibre drum	20,000		216
 <p>GREY 18-8 AWG WIRE RANGE: max: 3 #10 min: 3 #14 w/1 #18 VOLTAGE: 600 volt max**</p>					
WWC-G-C	14139	box of 50	1,600	(32 boxes of 50)	22
WWC-G-SJ	14246	standard jar of 50	1,000	(20 jars of 50)	18
WWC-G-P	14178	pail of 150	1,800	(12 pails of 150)	26
WWC-G-B*	14140	bag of 250	2,750	(11 bags of 250)	33
WWC-G-CB	78834	blister box of 12	varies based on quantity ordered		
WWC-G	14141	bulk	5,000		40
 <p>BLUE 14-6 AWG WIRE RANGE: max: 1 #8 w/3 #10 min: 2 #10 w/1 #12 VOLTAGE: 600 volt max**</p>					
WWC-B-H	14131	bag of 6 with header	1,200	(200 bags of 6)	26
WWC-B-C	14121	box of 50	1,100	(22 boxes of 50)	17
WWC-B-SJ	14247	standard jar of 50	1,000	(20 jars of 50)	23
WWC-B-J	14148	large jar of 125	1,500	(12 jars of 125)	32
WWC-B-P	14177	pail of 90	1,080	(12 pails of 90)	24
WWC-B-B	14122	bag of 100	1,600	(16 bags of 100)	28
WWC-B	14123	bulk	2,500		36
WWC-B-CB	78835	blister box of 8	varies based on quantity ordered		
WWC-B-D	14007	fibre drum	9,500		125


*Socket installation tools are included at no extra charge in each bag of Easy-Twist connectors (catalog number with "-B" suffix). They will fit any pneumatic or electrical tool with a 1/4 inch chuck or drive socket.



Easy-Twist™

WINGED GROUNDING AND STANDARD N-TYPE WIRE CONNECTORS

GROUNDING CONNECTORS



- Color coded GREEN for quick identification as a grounding conductor for copper wire only
- Specifically designed for making positive ground connections and bonding non-metallic sheathed cable
- Live-action square spring draws wires deep into the spring for a safe, tight grip ensuring an excellent connection
- Swept-back wing design enables users to tighten connectors easily by hand.


TYPICAL EXAMPLE:

X System grounding wire **Y** System grounding wire **Z** "Through" wire between device and box ground

NOTE: If "through" wire is a jumper, be sure wire extends below skirt 6" min.

FOR COPPER WIRE ONLY


CATALOG NO.	UPC CODE	UNIT	PACKAGING		WEIGHT LBS./CTN.
			CARTON		
WWC-GR-H	14142	bag of 25 with header	5,000 (200 bags of 25)		36
WWC-GR-C	14127	box of 100	3,200 (32 boxes of 100)		25
WWC-GR-SJ	14250	standard jar of 100	2,000 (20 jars of 100)		19
WWC-GR-J	14149	large jar of 350	4,200 (12 jars of 350)		39
WWC-GR-P	14179	pail of 250	3,000 (12 pails of 250)		25
WWC-GR-B	14128	bag of 500	4,500 (9 bags of 500)		31
WWC-GR-CB	78836	blister box of 25	varies based on quantity ordered		
WWC-GR	14129	bulk	5,500		35
WWC-GR-D	14162	fibre drum	25,000		151



DIMENSIONS

CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
WWC-GR	8.30	0.327	12.10	0.476	20.20	0.795	9.40	0.370	28.80	1.134


WINGED WIRE CONNECTORS - N TYPE



- Temperature rating 105°C (221°F)
- Made from nylon 6/6 (Polyimide 66)
- Swept-back design provides firm and comfortable twisting
- Inserted with fixed, square-wire spring grabs wires quickly and firmly
- Compact design perfect for tight spaces
- Color coded to industry standards
- Pre-twisting of wires is not necessary
- 1,000 volt maximum in fixtures and signs.

FOR COPPER WIRE ONLY



CATALOG NO.	COLOR CODE	UPC CODE	UNIT	PACKAGING		WEIGHT LBS./CTN.
				CARTON		
WWC-N1-H	yellow	14259	bag of 25 with header	1,000 (40 bags of 25)		5.35
WWC-N1-C	yellow	14172	box of 100	4,500 (45 boxes of 100)		20
WWC-N1-CJ	yellow	14234	small jar of 100	5,000 (50 jars of 100)		25
WWC-N1-SJ	yellow	14248	standard jar of 250	5,000 (20 jars of 250)		24
WWC-N1-J	yellow	14151	large jar of 600	7,200 (12 jars of 600)		31
WWC-N1-P	yellow	14257	pail of 450	5,400 (12 pails of 450)		25
WWC-N1-B	yellow	14252	bag of 500	6,500 (13 bags of 500)		25
WWC-N1	yellow	14253	bulk	10,000		37
WWC-N1-D	yellow	14260	fibre drum	45,000		168
WWC-N2-H	red	14261	bag of 25 with header	1,000 (40 bags of 25)		7.3
WWC-N2-C	red	14175	box of 100	3,200 (32 boxes of 100)		22
WWC-N2-SJ	red	14249	standard jar of 100	2,000 (20 jars of 100)		17
WWC-N2-J	red	14254	large jar of 400	4,800 (12 jars of 400)		32
WWC-N2-P	red	14258	pail of 250	3,000 (12 pails of 250)		22
WWC-N2-B	red	14255	bag of 500	4,500 (9 bags of 500)		27
WWC-N2	red	14256	bulk	10,000		33
WWC-N2-D	red	14262	fibre drum	25,000		183



DIMENSIONS

CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
WWC-N1	7.30	0.287	10.90	0.429	12.50	0.492	10.60	0.417	25.20	0.992
WWC-N2	9.10	0.358	13.20	0.520	14.80	0.583	11.50	0.453	29.50	1.161

TWIST-ON WIRE CONNECTORS - STANDARD TYPE



- Flame retardant UL 94V-2 thermoplastic shell provides excellent electrical insulation
- Temperature rating 105°C (221°F)
- Fixed, precise square wire spring provides secure gripping of conductors
- Deep skirt entry provides protection from flashover and shorts

- Sure-grip ribs improve gripping ability and comfort;
- Compact design ensures proper installation – especially in tight spaces
- Threaded funnel entry guides the wires into the connector easily
- Pre-twisting of wires is not necessary
- 1,000 volt maximum in fixtures and signs.

DIMENSIONS

FOR COPPER WIRE ONLY

CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
WC-G	3.80	0.150	6.70	0.264	8.60	0.339	5.80	0.228	15.20	0.598
WC-B	4.10	0.161	7.00	0.276	9.80	0.386	5.90	0.232	17.60	0.693
WC-O	5.00	0.197	9.90	0.390	12.20	0.480	7.80	0.307	22.00	0.866
WC-Y	6.00	0.236	11.20	0.441	14.00	0.551	7.90	0.311	24.00	0.945
WC-R	7.50	0.295	13.00	0.511	16.40	0.645	9.15	0.360	26.50	1.042

CATALOG NO.	UPC CODE	UNIT	PACKAGING		WEIGHT LBS./CTN.
			CARTON		
WC-G-H	14004	bag of 25 with header	15,000	(600 bags of 25)	26
WC-G-C	14001	box of 100	7,700	(77 boxes of 100)	14
WC-G-SJ	14107	small jar of 300	15,000	(50 jars of 300)	22
WC-G-B*	14002	bag of 1,000	26,000	(26 bags of 1,000)	27
WC-G-CB	78826	blister box of 100	varies based on quantity ordered		
WC-G	14003	bulk	25,000		26
WC-B-H	14014	bag of 25 with header	10,000	(400 bags of 25)	24
WC-B-C	14011	box of 100	7,700	(77 boxes of 100)	17
WC-B-SJ	14239	small jar of 300	15,000	(50 jars of 300)	30
WC-B-B*	14012	bag of 1,000	18,000	(18 bags of 1,000)	28
WC-B-CB	78827	blister box of 100	varies based on quantity ordered		
WC-B	14013	bulk	10,000		17
WC-O-H	14024	bag of 25 with header	6,250	(250 bags of 25)	25
WC-O-C	14021	box of 100	4,500	(45 boxes of 100)	17
WC-O-CJ	14230	small jar of 100	5,000	(50 jars of 100)	22
WC-O-SJ	14240	standard jar of 300	6,000	(20 jars of 300)	24
WC-O-J	14025	large jar of 700	8,400	(12 jars of 700)	30
WC-O-P	14174	pail of 500	6,000	(12 pails of 500)	23
WC-O-B*	14022	bag of 500	8,000	(16 bags of 500)	25
WC-O-CB	78828	blister box of 50	varies based on quantity ordered		
WC-O	14023	bulk	10,000		31
WC-O-D	14026	fibre drum	50,000		130
WC-Y-H	14034	bag of 20 with header	4,000	(200 bags of 20)	23
WC-Y-C	14031	box of 100	4,500	(45 boxes of 100)	26
WC-Y-CJ	14231	small jar of 100	5,000	(50 jars of 100)	29
WC-Y-SJ	14241	standard jar of 200	4,000	(20 jars of 200)	23
WC-Y-J	14035	large jar of 500	6,000	(12 jars of 500)	31
WC-Y-P	14176	pail of 300	3,600	(12 pails of 300)	21
WC-Y-B*	14032	bag of 500	6,000	(12 bags of 500)	27
WC-Y-CB	78829	blister box of 40	varies based on quantity ordered		
WC-Y	14033	bulk	10,000		44
WC-Y-D	14036	fibre drum	35,000		185
WC-R-H	14044	bag of 20 with header	3,000	(150 bags of 20)	22
WC-R-C	14041	box of 100	3,200	(32 boxes of 100)	25
WC-R-SJ	14242	standard jar of 100	2,000	(20 jars of 100)	17
WC-R-J	14045	large jar of 350	4,200	(12 jars of 350)	34
WC-R-P	14173	pail of 200	2,400	(12 pails of 200)	19
WC-R-B*	14042	bag of 500	4,000	(8 bags of 500)	24
WC-R-CB	78830	blister box of 25	varies based on quantity ordered		
WC-R	14043	bulk	5,000		35
WC-R-D	14046	fibre drum	25,000		195

GREY 22-14 AWG
 WIRE RANGE: max: 1 #14 w/1 #20 min: 2 #22
 VOLTAGE: 300 volt

BLUE 22-14 AWG
 WIRE RANGE: max: 3 #16 min: 2 #22
 VOLTAGE: 300 volt

ORANGE 22-14 AWG
 WIRE RANGE: max: 4 #16 w/1 #20 min: 1 #18 w/1 #20
 VOLTAGE: 600 volt max**

YELLOW 22-10 AWG
 WIRE RANGE: max: 1 #10 w/2#14 w/1 #16 min: 3 #20
 VOLTAGE: 600 volt max**

RED 22-8 AWG
 WIRE RANGE: max: 3 #10 min: 3 #18
 VOLTAGE: 600 volt max**

*Socket installation tools are included at no extra charge in each bag of Easy-Twist connectors (catalog number with "-B" suffix). They will fit any pneumatic or electrical tool with a 1/4 inch chuck or drive socket.

HIGH TEMPERATURE 150°C



- Flame retardant UL 94V-2 thermoplastic shell provides excellent electrical insulation
- Temperature rating 150°C
- Fixed precise square wire spring provides secure gripping of conductors
- Deep skirt entry provides protection from flash-over and shorts
- Sure-grip ribs improve gripping ability and comfort
- Compact design ensures proper installation, especially in tight spaces
- Threaded funnel entry guides the wires into the connector easily
- Pre-twisting of wires is not necessary.

CATALOG NO.	UPC CODE	COLOR CODE	VOLTAGE	WIRE RANGE	UNIT	PACKAGING		FOR COPPER WIRE ONLY
						CARTON	WEIGHT LBS./CTN.	
WC-HB1-B*	14150	black	600 volt	22-14 AWG	bag of 1,000	26,000 (26 bags of 1,000)		32
WC-HB1	14151	black	600 volt	22-14 AWG	bulk	10,000		15.25
WC-HB3-B*	14160	black	600 volt	22-14 AWG	bag of 500	8,000 (16 bags of 500)		36
WC-HB3	14161	black	600 volt	22-14 AWG	bulk	10,000		41.55

*Socket installation tools are included at no extra charge in each bag of Easy-Twist connectors (catalog number with "-B" suffix). They will fit any pneumatic or electrical tool with a 1/4 inch chuck or drive socket.

CRIMP SLEEVE WIRE CONNECTORS



- Copper crimp sleeves are designed for easy installation and provide an exceptional connection.

CATALOG NO.	UPC CODE	WIRE RANGE	UNIT	PACKAGING		FOR COPPER WIRE ONLY
				CARTON	WEIGHT LBS./CTN.	
SB1810	08120	18-10 AWG	blister box of 100	8,000 (80 boxes of 100)		19
SB1810-B	08122	18-10 AWG	bag of 500	15,000 (30 boxes of 500)		36
SB1808	08121	18-8 AWG	blister box of 100	5,000 (50 boxes of 100)		23
SB1808-B	08123	18-8 AWG	bag of 500	10,000 (20 boxes of 500)		45


NYLON CLOSED END



- Made from nylon 6/6 (Polyimide 66);
- UL 94 V-2 self-extinguishing;
- Rated 300 volts;
- Temperature rating to 105°C.

CATALOG NO.	UPC CODE	COLOR CODE	VOLTAGE	WIRE RANGE	UNIT	PACKAGING		FOR COPPER WIRE ONLY
						CARTON	WEIGHT LBS./CTN.	
C22-N	06800	natural	300 volt	22-18 AWG	box of 100	1,800 (18 boxes of 100)		2.5
C22-N-B	06850	natural	300 volt	22-18 AWG	bag of 1,000	30,000 (30 bags of 1,000)		34
C16-N	06801	natural	300 volt	22-14 AWG	box of 100	1,200 (12 boxes of 100)		2.4
C16-N-B	06851	natural	300 volt	22-14 AWG	bag of 1,000	20,000 (20 bags of 1,000)		27
C12-N	06802	natural	300 volt	22-10 AWG	box of 50	600 (12 boxes of 50)		2.4
C12-N-B	06852	natural	300 volt	22-10 AWG	bag of 1,000	10,000 (10 bags of 1,000)		32
C8-N	06803	natural	300 volt	16-10 AWG	box of 40	480 (12 boxes of 40)		3
C8-N-B	06853	natural	300 volt	16-10 AWG	bag of 500	6,000 (12 bags of 500)		34

DIMENSIONS









CATALOG NO.	A		B		C		D		E	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
C22-N	2.60	0.102	6.20	0.244	7.80	0.307	6.20	0.244	18.00	0.709
C16-N	3.00	0.118	7.90	0.311	9.50	0.374	7.20	0.283	19.70	0.776
C12-N	4.00	0.157	10.50	0.413	12.50	0.492	9.60	0.378	25.50	1.004
C8-N	5.30	0.209	12.40	0.488	14.60	0.575	12.00	0.472	27.70	1.091

PUSH-IN WIRE CONNECTORS (FOR SOLID OR STRANDED COPPER WIRES)




- Large wire range: accommodates 22-12 AWG solid or stranded copper wire
- Fast, safe and reliable installation saves time and money
- No twisting or taping of conductors required
- Just strip the wire, insert the connector and you are done
- One wire per opening ensures loose connections are eliminated
- Made of strong, UL 94V-2 flame retardant polycarbonate
- Rated 600 volts (up to 1,000 volts for fixtures and signs)
- Temperature range from -40°F to 221°F (-30°C to 105°C)
- Integrated test port enables continuity testing
- Color coded for easy identification
- Compact design perfect for tight spaces.


CATALOG NO.	UPC CODE	COLOR CODE	NUMBER OF WIRES	UNIT	PACKAGING		WEIGHT LBS./CTN.
						CARTON	
PIWC-2-C	14211	yellow	2	box of 100		4,500 (45 boxes of 100)	29
PIWC-2-B	14221	yellow	2	bag of 500		7,000 (14 bags of 500)	39
PIWC-3-C	14212	orange	3	box of 100		4,500 (45 boxes of 100)	38
PIWC-3-B	14222	orange	3	bag of 500		5,500 (11 bags of 500)	42
PIWC-4-C	14213	clear	4	box of 75		3,375 (45 boxes of 75)	37
PIWC-4-B	14223	clear	4	bag of 400		4,400 (11 bags of 400)	42
PIWC-5-C	14214	blue	5	box of 50		2,250 (45 boxes of 50)	30
PIWC-5-B	14224	blue	5	bag of 300		3,600 (12 bags of 300)	42
PIWC-6-C	14326	purple	6	box of 50		2,250 (45 boxes of 50)	35
PIWC-6-B	14327	purple	6	bag of 250		3,000 (12 bags of 250)	41
PIWC-8-C	14215	grey	8	box of 40		1,800 (45 boxes of 40)	36
PIWC-8-B	14225	grey	8	bag of 200		2,400 (12 bags of 200)	44

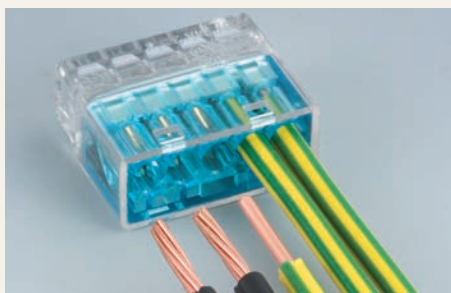


INSTALLATION




TURN OFF POWER.
Strip wire approximately 0.45 inches (11mm).



Push the stripped conductor into the port of connector fully. No more twisting or taping.



Use a voltage meter to test your connection via the port on connector.




NEW

PUSH-IN WIRE CONNECTORS

Wire Range 22-12 AWG!

solid AND stranded

- Available in 2, 3, 4, 5, 6 and 8 port configurations
- Two-blade construction holds wire more securely
- In-line construction on all sizes (compare to stacked construction) allows for greater flexibility when fitting into boxes & other tight spaces
- Clear construction for visual inspection
- Stranded conductors do not need to be tinned

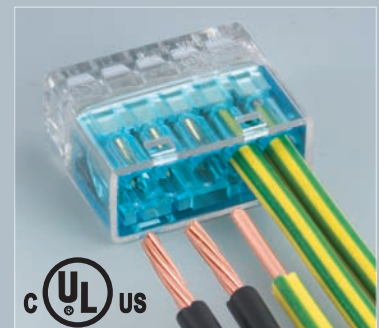

c  us

FOR COPPER WIRE ONLY

NSi

NSi Industries, LLC

USA • 800.321.5847 • www.nsiindustries.com • www.tork.com



Alphanumeric Index

CATALOG NUMBER	PAGE
C8.....	5
C12.....	5
C16.....	5
C22.....	5
ET-CP.....	1
P1WC.....	6
SB.....	5
WC-B.....	4
WC-G.....	4
WC-HB.....	5
WC-O.....	4
WC-R.....	4
WC-Y.....	4
WWC-B.....	1,2
WWC-G.....	1,2
WWC-GR.....	3
WWC-N1.....	3
WWC-N2.....	3
WWC-R.....	1,2
WWC-T.....	1,2
WWC-Y.....	1,2

NSi Industries LLC

9730 Northcross Center Ct.
 Huntersville,
 North Carolina USA
 28078

Phone Toll Free:
 800.321.5847

Fax Toll Free:
 800.841.5566

Email:
nsi@nsiindustries.com

Website:
www.nsiindustries.com



Terms of Sale

Vendor Number: 662381

1. Prices are F.O.B. our plant.
2. Prices do not include any sales tax.
3. Freight charges will be prepaid on all orders \$250.00 and over shipping within continental USA using standard shipping methods and service.
4. Minimum order – \$100.00.
5. Claims for shortage, erroneous charges or price corrections shall be deemed waived unless made in writing, delivered to NSi within 30 days of invoice.
6. Terms of payment – 2% 10th prox. net 25th following.
7. Warranties – NSi guarantees all products to be free of defects in material and workmanship for a period of 90 days from date of sale. Any claims for defective material must be agreed to in writing by NSi. Defective material will be replaced on an F.O.B. – our factory basis. NSi disclaims the implied warranty of fitness for a particular application.


Other Products Available

NSi can provide many other products for special applications which are not listed in this catalog. If you require an item which you do not find listed, please contact us. We would be pleased to provide a quotation upon receipt of a drawing or a sample.

Guarantee

It is our goal to provide extraordinary products and service on a daily basis. If our products or service do not meet with your satisfaction, please let us know immediately and we promise to make every reasonable effort to remedy the situation.

MAKING AN **EASY** CONNECTION

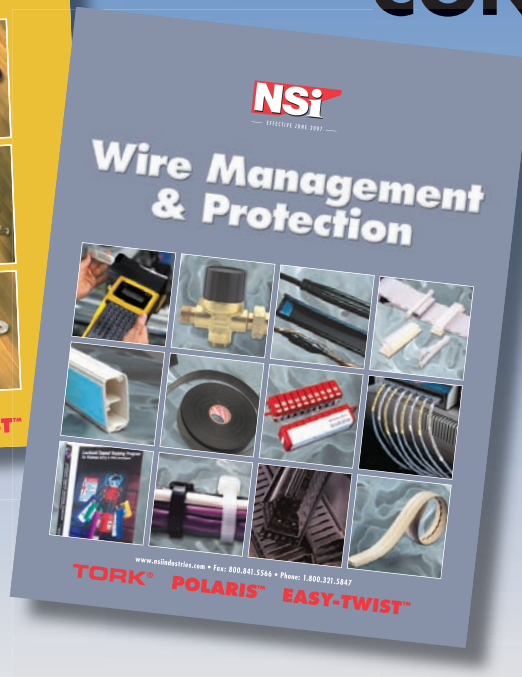

Making it easy to get your project completed:

- Winged Wire Connectors
- All Plastic Twist-On
- Nylon Closed End
- Push-In Wire Connectors
- Grounding Connectors
- Crimp Sleeve Wire Connectors

Thousands of quality products that make life in the field easier and safer.

YOUR REPRESENTATIVE:

